

SHEARBOLT CONNECTOR LINK 1KV



SPECIFICATIONS:

Materials

Copper

Industrial Term for Material

Oxygen Free High Conductivity Copper

Treatment

Electroplated Tin

Content Purity

Copper 99.95%

Tin (Surface) 99.99%

Oxygen Presence

0.001% = 10ppm (parts per million)

Temperature Range

-55° - 155°C

Final Metal State


Fully annealed

Standards and Compliance

AS/NZ 4325:1; EN 60998-1:2004

Heat Cycling test to AS/NZS 4325.1 and IEC 61238-1-1

Mechanical pulling test to AS/NZS 4325.1 and IEC 61238-1-1

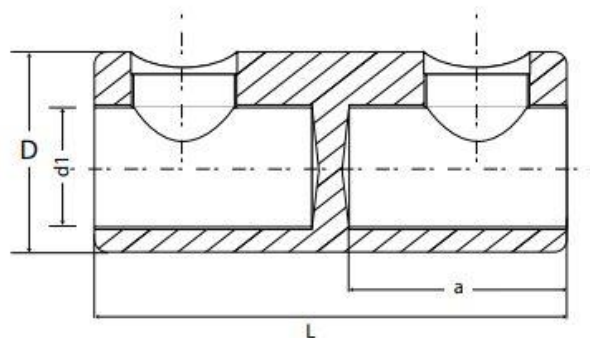

Part Number	Nominal Cable Size (mm ²)	Dimensions (mm)			
		D1	D	L	A
UTSCLK 16-25	16-35	9	18	40	18
UTSCLK 16-50	16-50	11	21	55	25

Part Number	Nominal Cable Size (mm ²)	Dimensions (mm)			
		D1	D	L	A
UTSCLK 25-95	25-95	14	25	55	25
UTSCLK 25-150	25-150	17.5	28	70	32.5
UTSCLK 25-185	25-185	21	35	80	37.5
UTSCLK 120-240	120-240	23	38	128	60

