

COPPER CRIMP LINKS



SPECIFICATIONS:

Materials

Copper

Industrial Term for Material

Oxygen Free High Conductivity Copper

Treatment

Electroplated Tin

Content Purity

Copper 99.95%

Tin (Surface) 99.99%

Oxygen Presence

0.001% = 10ppm (parts per million)

Temperature Range

-55° - 155°C

Final Metal State


Fully annealed

Standards and Compliance

AS/NZ 4325:1; EN 60998-1:2004

Heat Cycling test to AS/NZS 4325.1 and IEC 61238-1-1

Mechanical pulling test to AS/NZS 4325.1 and IEC 61238-1-1

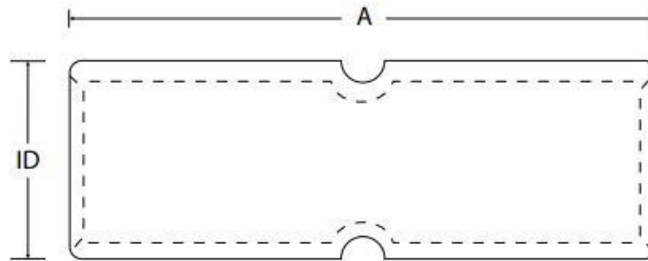

Part Number	Cable Size	Dimensions (mm)		A/F Hex Die (mm)	Pack Size
		A	I.D.		
UTCL1.5	1.5mm ²	22.0	2.0	-	100
UTCL2.5	2.5mm ²	22.0	2.5	-	100
UTCL4.0	4mm ²	22.0	3.3	-	100
UTCL6.0	6mm ²	22.0	3.8	4.4	100
UTCL10.0	10mm ²	22.0	4.7	5.7	100
UTCL16.0	16mm ²	44.0	5.5	6.3	100

Part Number	Cable Size	Dimensions (mm)		A/F Hex Die (mm)	Pack Size
		A	I.D.		
UTCL25.0	25mm ²	48.0	7.1	7.7	50
UTCL35.0	35mm ²	48.0	8.4	9.2	50
UTCL50.0	50mm ²	48.0	9.5	10.4	50
UTCL70.0	70mm ²	52.0	11.3	11.5	25
UTCL95.0	95mm ²	54.0	13.4	14.2	1
UTCL120.0	120mm ²	66.0	15.6	16.5	1
UTCL150.0	150mm ²	66.0	16.7	18.3	1
UTCL185.0	185mm ²	66.0	18.4	20.0	1
UTCL240.0	240mm ²	91.0	21.2	23.1	1
UTCL300.0	300mm ²	91.0	23.8	26.0	1
UTCL400.0	400mm ²	91.0	26.8	28.1	1
UTCL500.0	500mm ²	114	30.0	31.0	1
UTCL630.0	630mm ²	114	34.0	37.0	1

